

# Learning and predicting with statistical models

Kevin R. Coombes

May 27, 2025

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Simulated DataSet</b>	<b>1</b>
2.1	Training Data . . . . .	2
2.2	Test Data . . . . .	5
<b>3</b>	<b>Feature Selection</b>	<b>8</b>
<b>4</b>	<b>Fitting Models and Making Predictions</b>	<b>10</b>
4.1	K Nearest Neighbors . . . . .	10
4.2	Classification and regression trees . . . . .	10
4.3	Linear/Logistic Regression . . . . .	12
4.4	Compound Covariate Prediction . . . . .	13
4.5	Support Vector Machines . . . . .	14
4.6	Neural Networks . . . . .	15
4.7	Random Forests . . . . .	17

## 1 Introduction

We start, as usual, by loading the appropriate package:

```
> library(Modeler)
```

## 2 Simulated DataSet

In order to have something to test our models against, we simulate a dataset that has enough underlying structure to make it interesting. First, we set the random seed so that the results will be reproducible.

```
> set.seed(234843)
```

Next, we define the simulation parameters. We will simulate a dataset with `nFeatures` rows representing genes, only `nSignif` of which are significantly associated with the outcome of interest. We assume that both the training set and test set come from the same population, which is actually a mixture of two types, *A* and *B*, where the probability of belonging to type *B* is given by `pB`. The significant genes are assumed to be differentially expressed between the two types, with the difference in means following a normal distribution ( $\Delta \sim \text{Norm}(\delta, \sigma)$ ).

```

> nFeatures <- 10000
> nSignif <- 100
> pB <- 0.4
> delta <- 1
> sigma <- 0.3
> nTrain <- 100
> nTest <- 100

```

For cleanup purposes, we specify the names of things we can safely remove later.

```

> paramlist <- c("nFeatures", "nSignif", "pB",
+                  "delta", "sigma", "nTrain", "nTest")

```

In addition to simulating the class assignment ( $A$  or  $B$ ), we will also simulate a continuous outcome that represents a probability of belonging to class  $B$ . The continuous outcome (Figure 1) will follow a beta distribution with parameters  $\alpha$  and  $\beta$ .

```

> alpha <- 0.75
> beta <- 0.95
> round(100*pbeta(seq(0.1, 0.9, 0.1), alpha, beta), 1)
[1] 17.1 28.8 39.1 48.7 57.7 66.4 74.9 83.2 91.4

> xx <- seq(0, 1, length=300)
> yy <- dbeta(xx, alpha, beta)

```

Now we can actually start the simulation. For the differentially expressed genes, we make it equally likely that they are higher in  $A$  or higher in  $B$ .

```
> signed <- -1 + 2*rbinom(nSignif, 1, 0.5)
```

As noted above, the magnitude of the difference follows a normal distribution.

```

> offsets <- c(signed*rnorm(nSignif, delta, sigma), # can change in either direction
+                 rep(0, nFeatures - nSignif))           # but most don't change at all

```

## 2.1 Training Data

To simulate the training dataset, we first simulate the continuous outcomes (interpreted as the probability of belonging to class  $B$ ). These are transformed using a logit function so they lie on the entire real line.

```

> lp <- function(p) log(p/(1-p))
> ea <- function(a) 1/(1+exp(-a))
> p0ut <- rbeta(nTrain, alpha, beta)
> trainOutcome <- lp(p0ut)

```

The binary classes for the simulated samples are obtained by dichotomizing the probabilities.

```

> # TODO: Fix this so it looks at correlation with the continuous outcome
> # instead of just differential expression between classes
> trainClass <- factor(c("cyan", "magenta")[1 + 1*(p0ut > 0.5)])
> summary(trainClass)

```

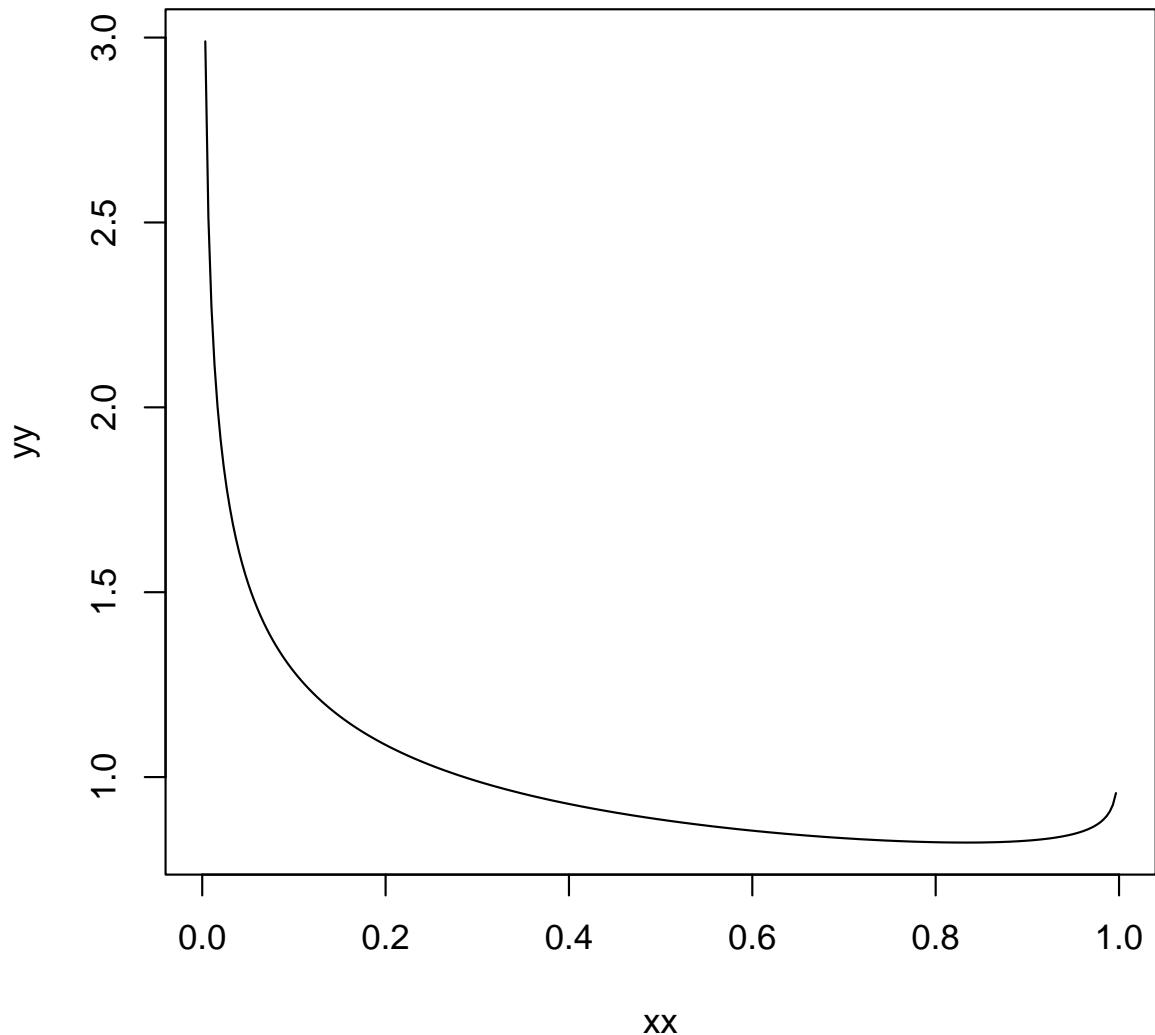


Figure 1: Probability of belonging to class B is simulated from this distribution, Beta(0.75, 0.95).

```

cyan magenta
 57      43

> isB <- trainClass=="magenta"
> summary(isB)

Mode   FALSE    TRUE
logical     57      43


```

Now we put together the training dataset.

```

> trainData <- matrix(rnorm(nFeatures*nTrain), ncol=nTrain) # pure noise
> trainData[,isB] <- sweep(trainData[,isB], 1, offsets, "+")
> trainData <- t(scale(t(trainData)))
> dimnames(trainData) <- list(paste("gene", 1:nFeatures, sep=' '),
+                               paste("trainsamp", 1:nTrain, sep=' '))
>

```

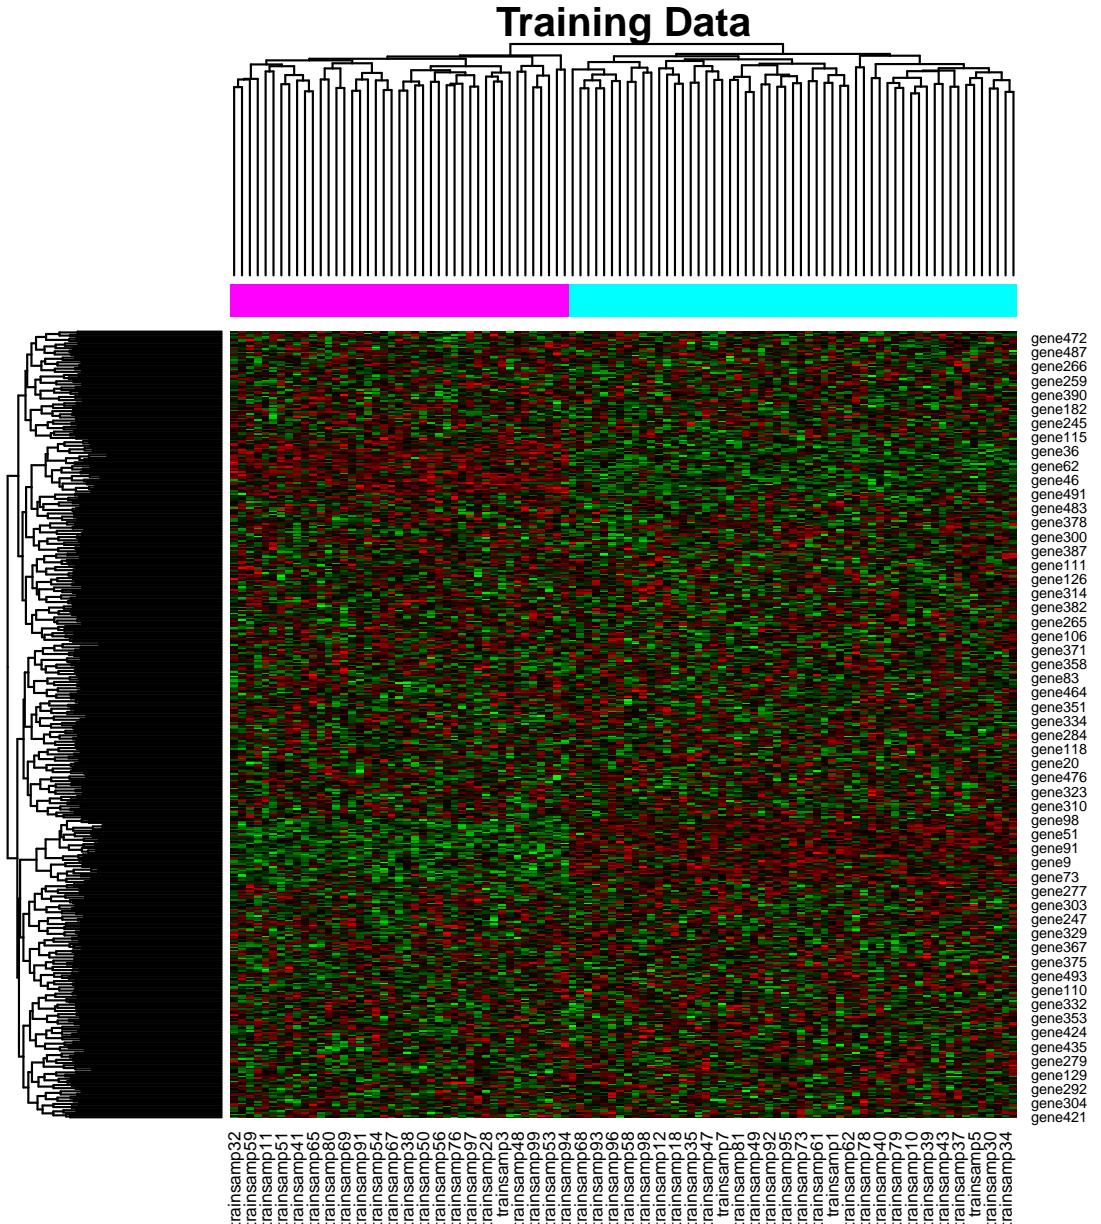

## 2.2 Test Data

We use the same procedure to simulate the test dataset, starting with continuous outcomes.

```
> p0ut <- rbeta(nTest, alpha, beta)
> test0utcome <- lp(p0ut)
```

We convert the continuous outcomes to binary class assignments.

```

> testClass <- factor(c("cyan", "magenta")[1 + 1*(pOut > 0.5)])
> summary(testClass)

cyan magenta
 57      43

> isB <- testClass=="magenta"
> summary(isB)

  Mode   FALSE    TRUE
logical     57      43


```

And we then generate the simulated microarray data.

```

> testData <- matrix(rnorm(nFeatures*nTest), ncol=nTest) # pure noise
> testData[,isB] <- sweep(testData[,isB], 1, offsets, "+")
> testData <- t(scale(t(testData)))
> dimnames(testData) <- list(paste("gene", 1:nFeatures, sep=''),
+                               paste("testsamp", 1:nTest, sep=''))

```

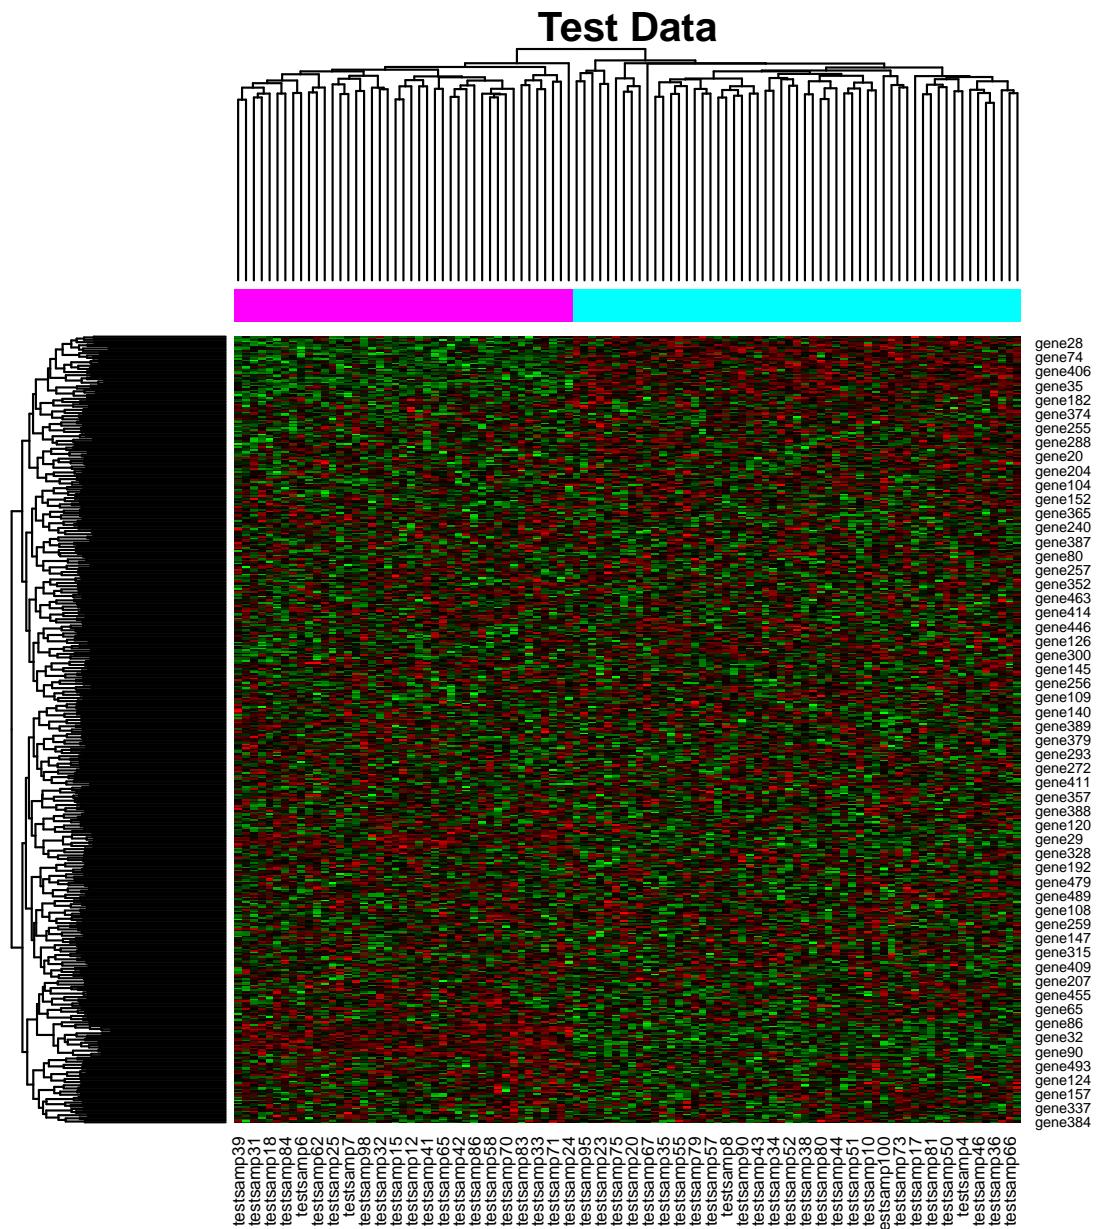


At this point, we can clean up the work space.

```
> rm(list=paramlist)
> rm(pOut, isB, signed, offsets)
> rm(xx, yy, alpha, beta)
> rm(paramlist)
```

### 3 Feature Selection

Here we implement a simple feature selection scheme. We first perform gene-by-gene t-tests on the training data to identify genes that are differentially expressed between the two classes.

```
> library(ClassComparison)
> mtt <- MultiTtest(trainData, trainClass)
```

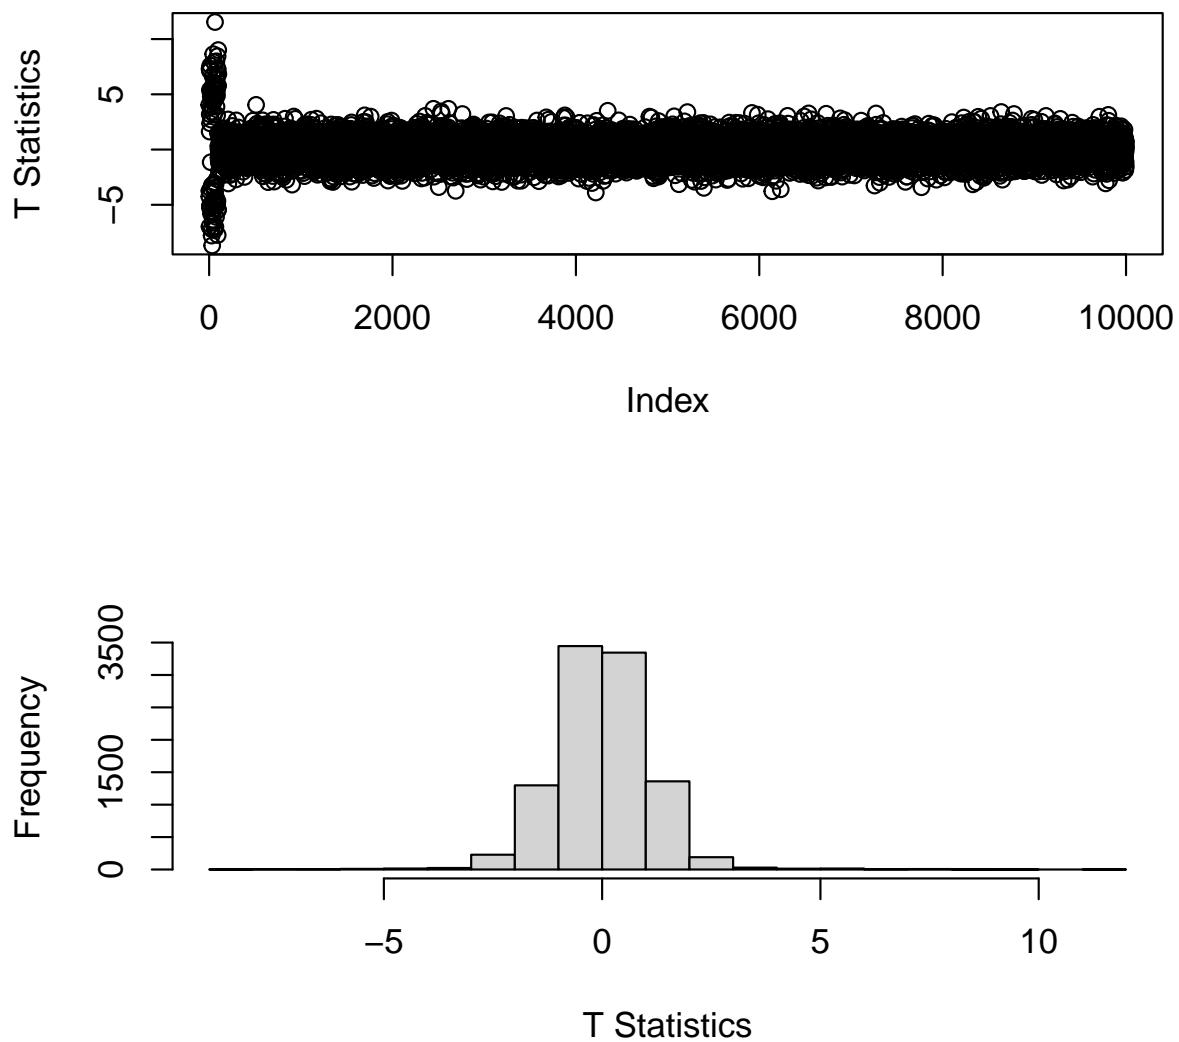


We then use a beta-uniform-mixture (BUM) model to estimate the false discover rate (FDR).

```

> bum <- Bum(mtt$p.values)
> countSignificant(bum, alpha=0.01, by="FDR")
[1] 78
> countSignificant(bum, alpha=0.05, by="FDR")
[1] 91
>

```

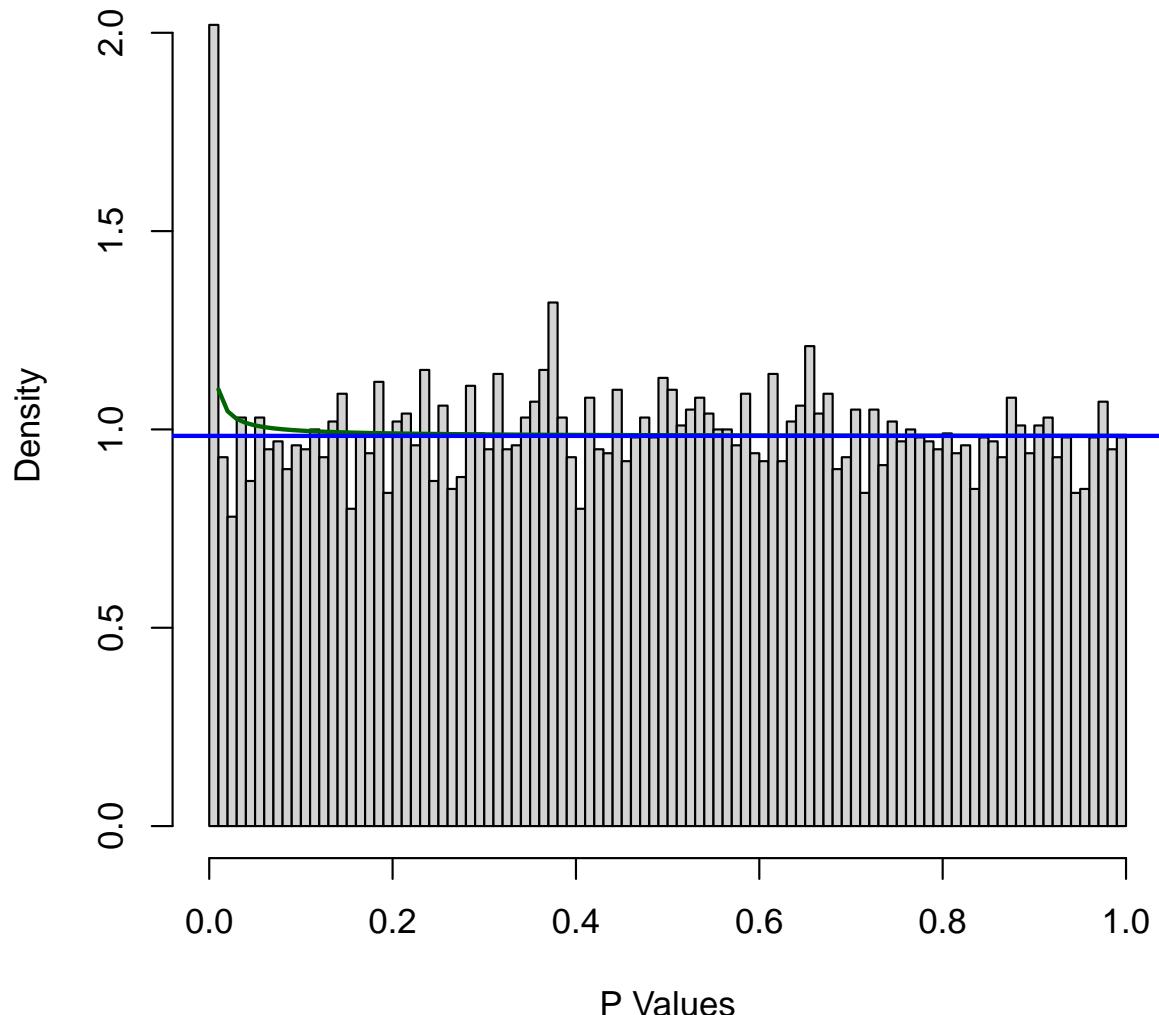

```

> geneset <- rownames(trainData)[selectSignificant(bum, alpha=0.05, by="FDR")]
> length(geneset)

[1] 91

> trainSubset <- trainData[geneset,]
> testSubset <- testData[geneset,]

```

## 4 Fitting Models and Making Predictions

### 4.1 K Nearest Neighbors

Note that the KNN method works for binary class prediction, but does not work for regression.

```

> knnFitted <- learn(modeler3NN, trainSubset, trainClass)
> knnPredictions <- predict(knnFitted, testSubset)
> table(knnPredictions, testClass)

          testClass
knnPredictions cyan magenta
      cyan      57      0
      magenta    0     43

>

> knnFitted <- learn(modeler5NN, trainSubset, trainClass)
> knnPredictions <- predict(knnFitted, testSubset)
> table(knnPredictions, testClass)

          testClass
knnPredictions cyan magenta
      cyan      57      0
      magenta    0     43

```

### 4.2 Classification and regression trees

Classification

```

> rpartFitted <- learn(modelerRPART, trainSubset, trainClass)
> rpartPredictions <- predict(rpartFitted, testSubset, type='class')
> table(rpartPredictions, testClass)

          testClass
rpartPredictions cyan magenta
      cyan      49      4
      magenta    8     39

```

Regression

```


> rpartFitted <- learn(modelerRPART, trainSubset, trainOutcome)
> rpartPredictions <- predict(rpartFitted, testSubset)
> table(rpartPredictions > 0, testClass)

```

```

testClass
  cyan magenta
FALSE    54      10
TRUE     3      33
> cor(rpartPredictions, testOutcome)
[1] 0.6316475
> temp <- lm(testOutcome ~ rpartPredictions)

```

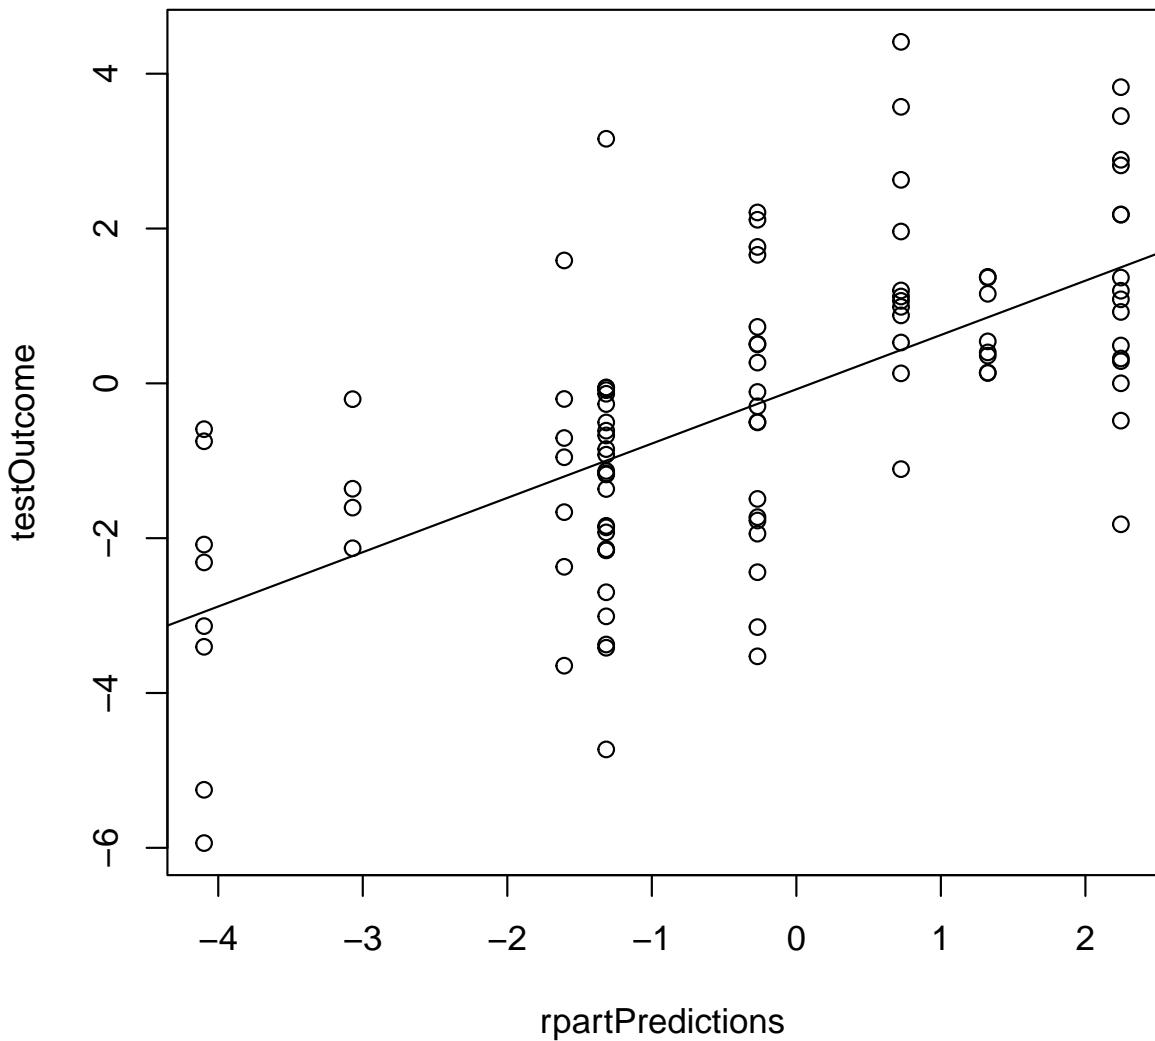

### 4.3 Linear/Logistic Regression

Classification


```
> # takes too long for the vignette, because of the "step"  
> # across glm fits.  
> lrFitted <- learn(modelerLR, trainSubset, trainClass)  
> lrPredictions <- predict(lrFitted, testSubset)  
> table(lrPredictions, testClass)
```

Regression

```
> lrFitted <- learn(modelerLR, trainSubset, trainOutcome)  
> lrPredictions <- predict(lrFitted, testSubset)  
> table(lrPredictions > 0, testClass)
```

	testClass	
	cyan	magenta
FALSE	34	19
TRUE	23	24

```
> cor(lrPredictions, testOutcome)  
[1] 0.12484  
  
> temp <- lm(testOutcome ~ lrPredictions)
```

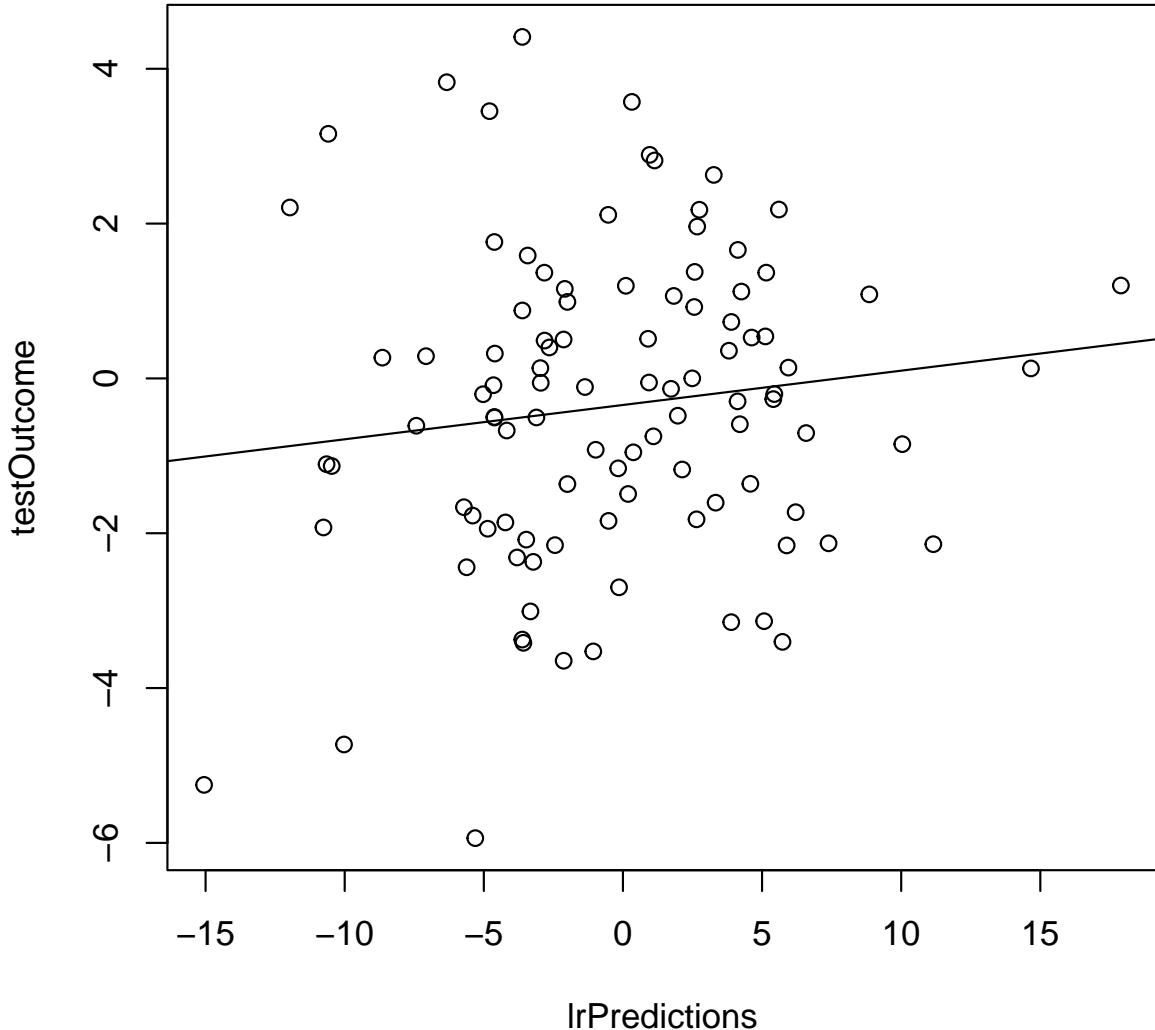

#### 4.4 Compound Covariate Prediction

Classification only

```
> ccpFitted <- learn(modelerCCP, trainSubset, trainClass)
> ccpPredictions <- predict(ccpFitted, testSubset)
> table(ccpPredictions, testClass)
```

```

    testClass
ccpPredictions cyan magenta
  cyan      57      0
  magenta     0     43

```

## 4.5 Support Vector Machines

Classification

```

> # takes too long for the vignette, because of the "step"
> # across glm fits.
> svmFitted <- learn(modelerSVM, trainSubset, trainClass)
> svmPredictions <- predict(svmFitted, testSubset)
> table(svmPredictions, testClass)

```

```

    testClass
svmPredictions cyan magenta
  cyan      57      0
  magenta     0     43

```

Regression

```


> svmFitted <- learn(modelerSVM, trainSubset, trainOutcome)
> svmPredictions <- predict(svmFitted, testSubset)
> table(svmPredictions > 0, testClass)

    testClass
      cyan magenta
FALSE   57      0
TRUE     0     43

> cor(svmPredictions, testOutcome)
[1] 0.7775552

> temp <- lm(testOutcome ~ svmPredictions)

```

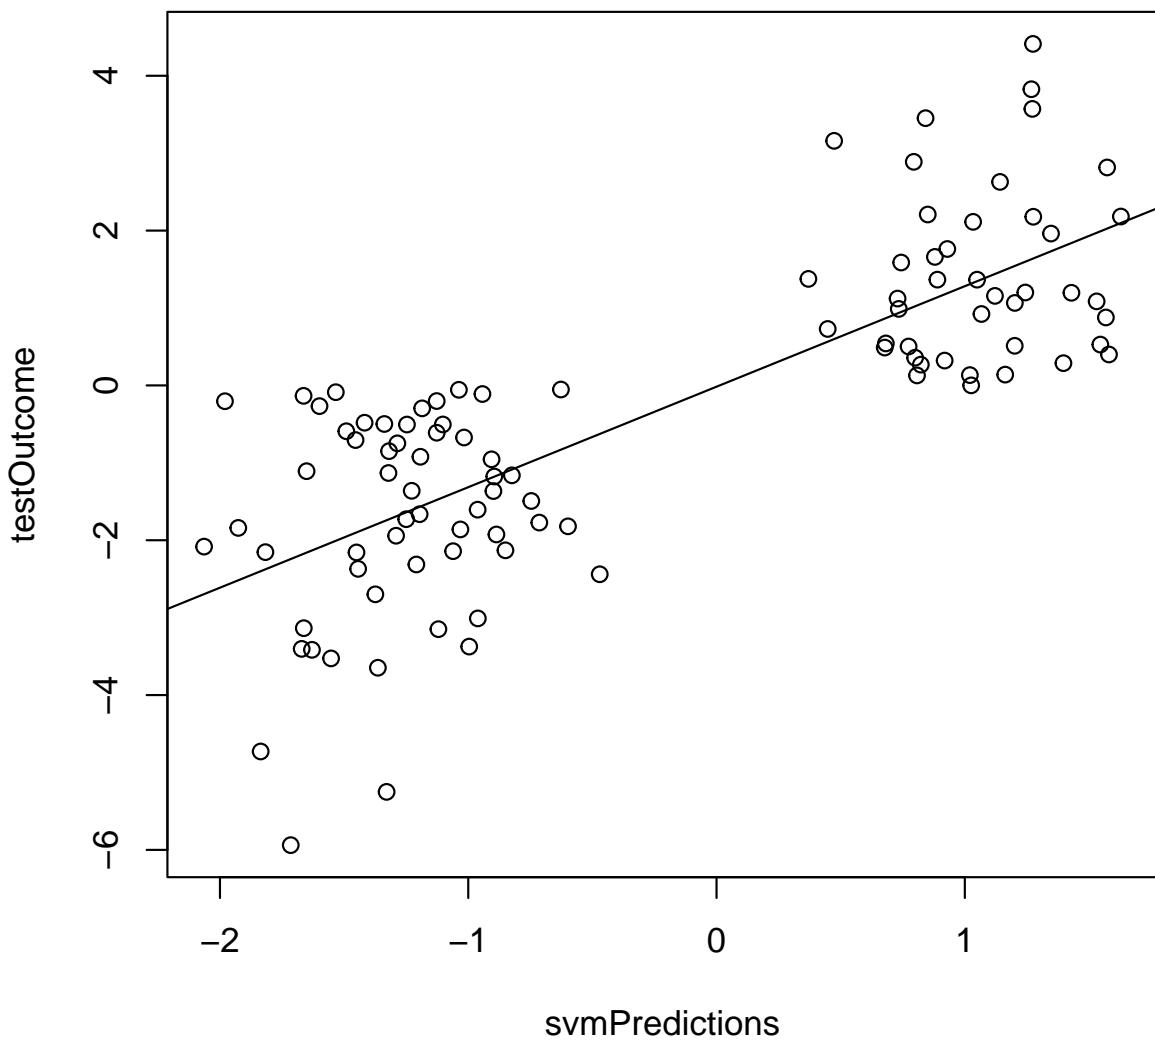

## 4.6 Neural Networks

Classification

```
> nnetFitted <- learn(modelerNNET, trainSubset, trainClass)  
# weights: 466  
initial value 77.599783  
iter 10 value 0.002918
```

```

final  value 0.000080
converged

> nnetPredictions <- predict(nnetFitted, testSubset)
> table(nnetPredictions, testClass)

      testClass
nnetPredictions      cyan magenta
  1.40115426339924e-06    1     0
  1.40129403562468e-06    1     0
  1.4017263397493e-06    1     0
  1.40181638348734e-06    1     0
  1.4018815155702e-06    1     0
  1.40188357795567e-06    1     0
  1.40188639659736e-06    1     0
  1.40188891908656e-06   50     0
  1                         0    43

Regression

> nnetFitted <- learn(modelerNNET, trainSubset, trainOutcome)

# weights:  466
initial  value 528.161386
final    value 484.616805
converged

> nnetPredictions <- predict(nnetFitted, testSubset)
> table(nnetPredictions > 0, testClass)


      testClass
      cyan magenta
FALSE    57     43

> cor(nnetPredictions, testOutcome)

 [,1]
[1,]   NA

> temp <- lm(testOutcome ~ nnetPredictions)

```

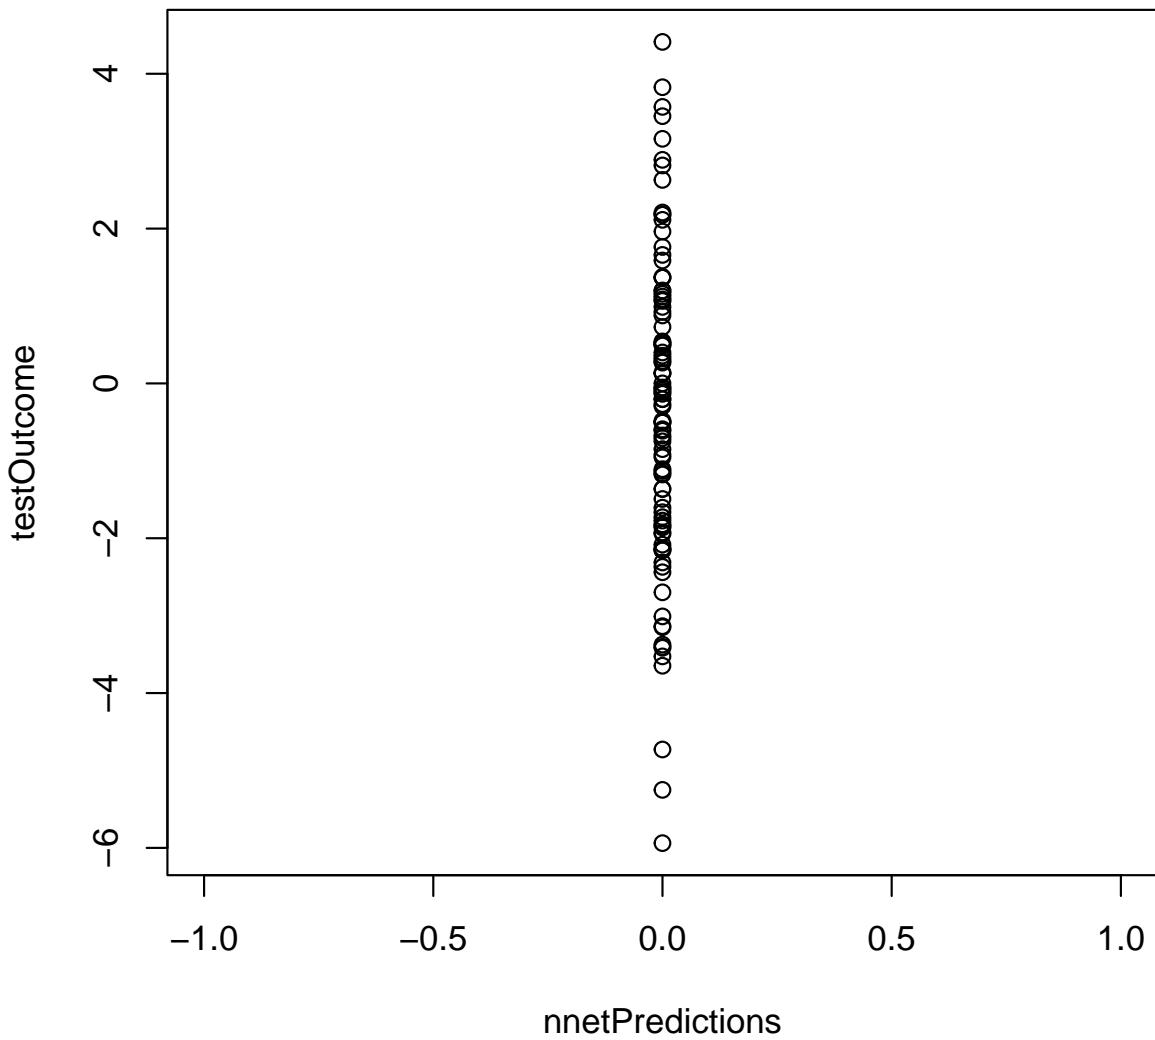

## 4.7 Random Forests

Classification

```
> rffitted <- learn(modelerRF, trainSubset, trainClass)
> rfPredictions <- predict(rffitted, testSubset)
> table(rfPredictions, testClass)
```

```

    testClass
rfPredictions  cyan magenta
  cyan      57      0
magenta     0     43

Regression

> rfFitted <- learn(modelerRF, trainSubset, trainOutcome)
> rfPredictions <- predict(rfFitted, testSubset)
> table(rfPredictions > 0, testClass)

    testClass
    cyan magenta
FALSE   57      3
TRUE     0     40

> cor(rfPredictions, testOutcome)
[1] 0.73546

> temp <- lm(testOutcome ~ rfPredictions)

```

