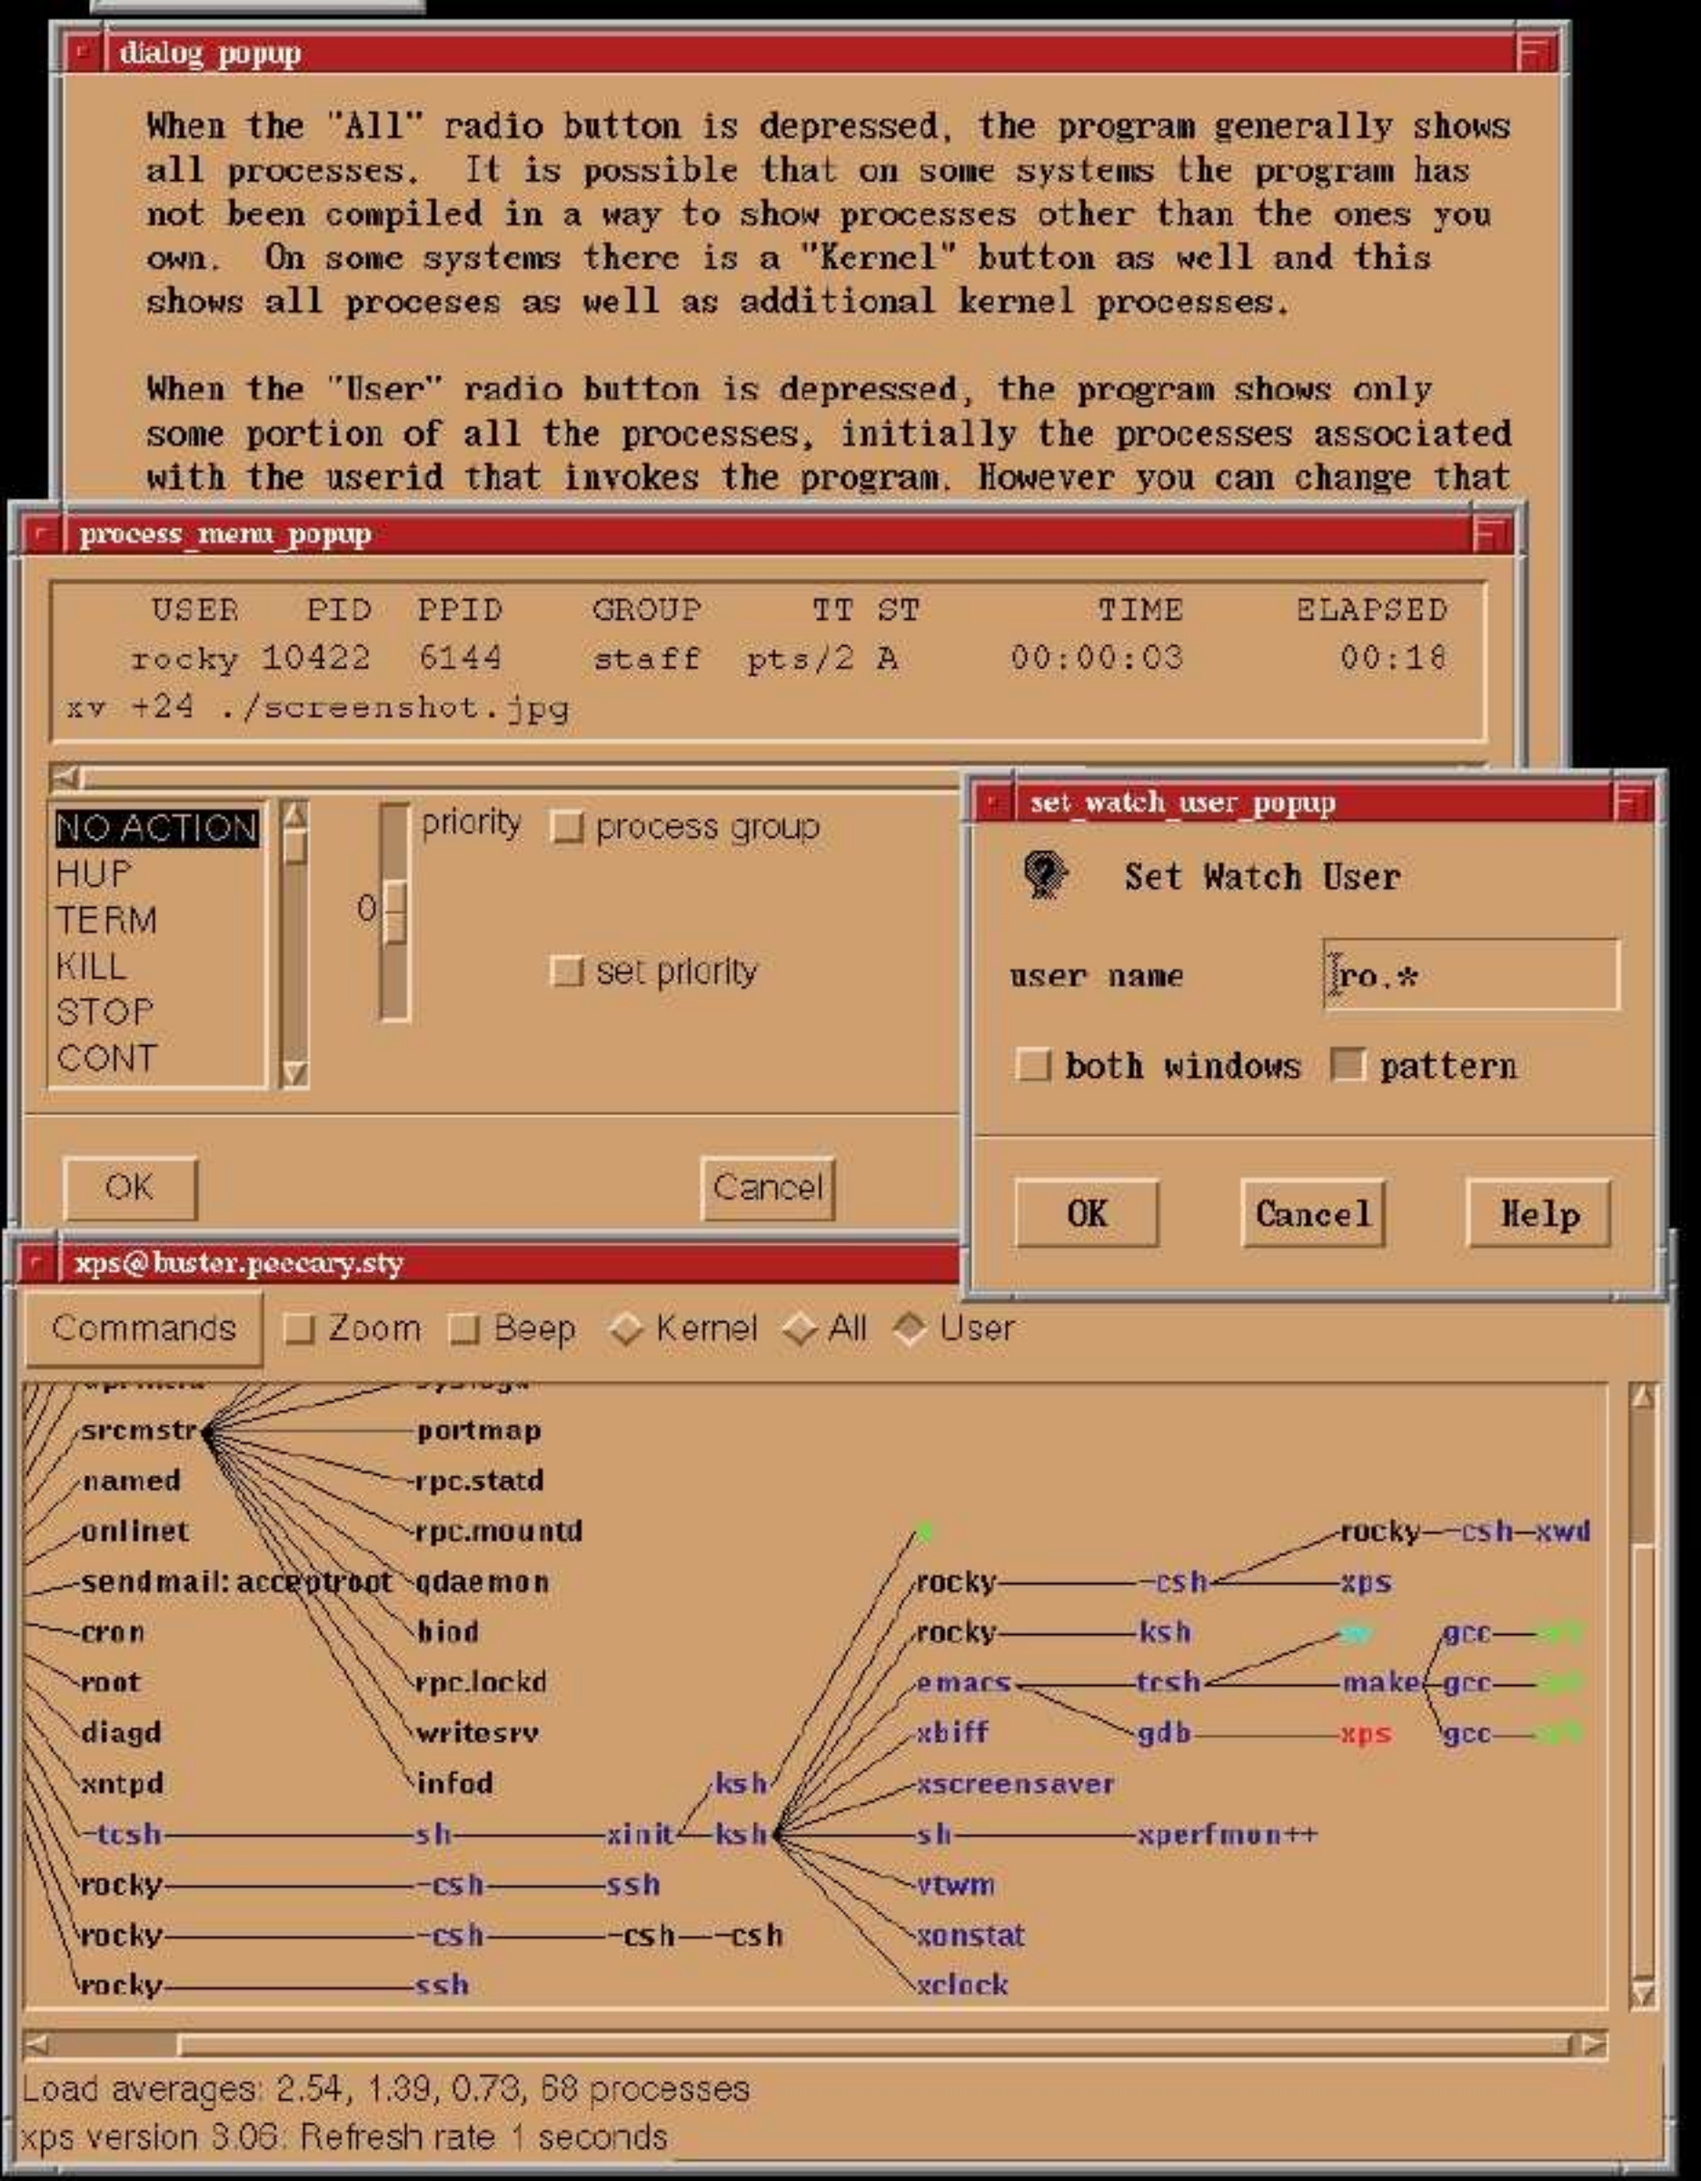
dialog_popup
When the "All" radio button is depressed, the program generally shows all processes. It is possible that on some systems the program has not been compiled in a way to show processes other than the ones you own. On some systems there is a "Kernel" button as well and this shows all proceses as well as additional kernel processes.
When the "User" radio button is depressed, the program shows only some portion of all the processes, initially the processes associated with the userid that invokes the program. However you can change that
process_menu_popup
USER PID PPID GROUP TT ST TIME ELAPSED
rocky 10422 6144 staff pts/2 A 00:00:03 00:18
xv +24 ./screenshot.jpg
NO ACTION
HUP
TERM
KILL
STOP
CONT
priority
process group
0
set priority
OK
Cancel
set_watch_user_popup
Set Watch User
user name
ro.*
both windows
pattern
OK
Cancel
Help
xps@buster.peccary.sty
Commands
Zoom
Beep
Kernel
All
User
srcmstr
named
onlinet
sendmail: acceptroot
cron
root
diagd
xntpd
portmap
rpc.statd
rpc.mountd
qdaemon
biod
rpc.lockd
writesrv
infod
tcsh
sh
xinit
ksh
ksh
rocky
csh
ssh
rocky
csh
csh
csh
rocky
ssh
rocky
csh
xps
rocky
ksh
emacs
tcsh
make
gcc
gcc
gcc
xbiff
gdb
xps
xscreensaver
sh
xperfmon++
vtwm
xonstat
xclock
Load averages: 2.54, 1.39, 0.73, 68 processes
xps version 3.06: Refresh rate 1 seconds